




RA554

ST558

Acier zingué	Inox	Super Extension	 Français	2
Zinc plated steel	Stainless steel	Over Extension	 English	3
Stahl silbern verzinkt	Edelstahl	Überauszüge	 Deutsch	4
Pozinkovaná ocel	Nerezová ocel	Extra výsuv	 Český	5
Acero zincado	Acero inoxidable	Super Extension	 Español	6
Acciaio zincato	Acciaio inox	Super Estensione	 Italiano	7
Verzinkt staal	Roestvrij staal	Over uittrekbaar	 Nederlands	8
Оцинковка	Нержавеющая сталь	Сверхвыдвижение	 Русский	9
Stal ocynkowana	Stal nierdzewna	Wysuw powyżej pełnego	 Polski	10

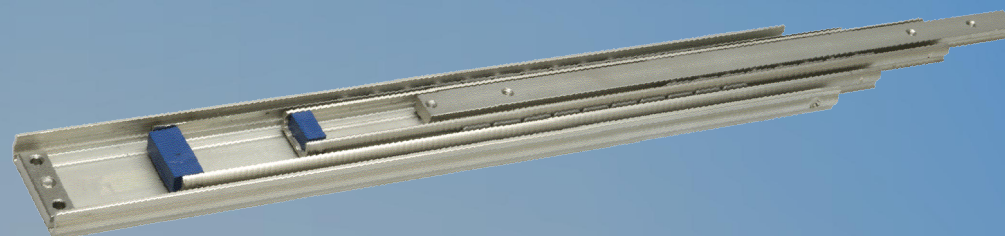

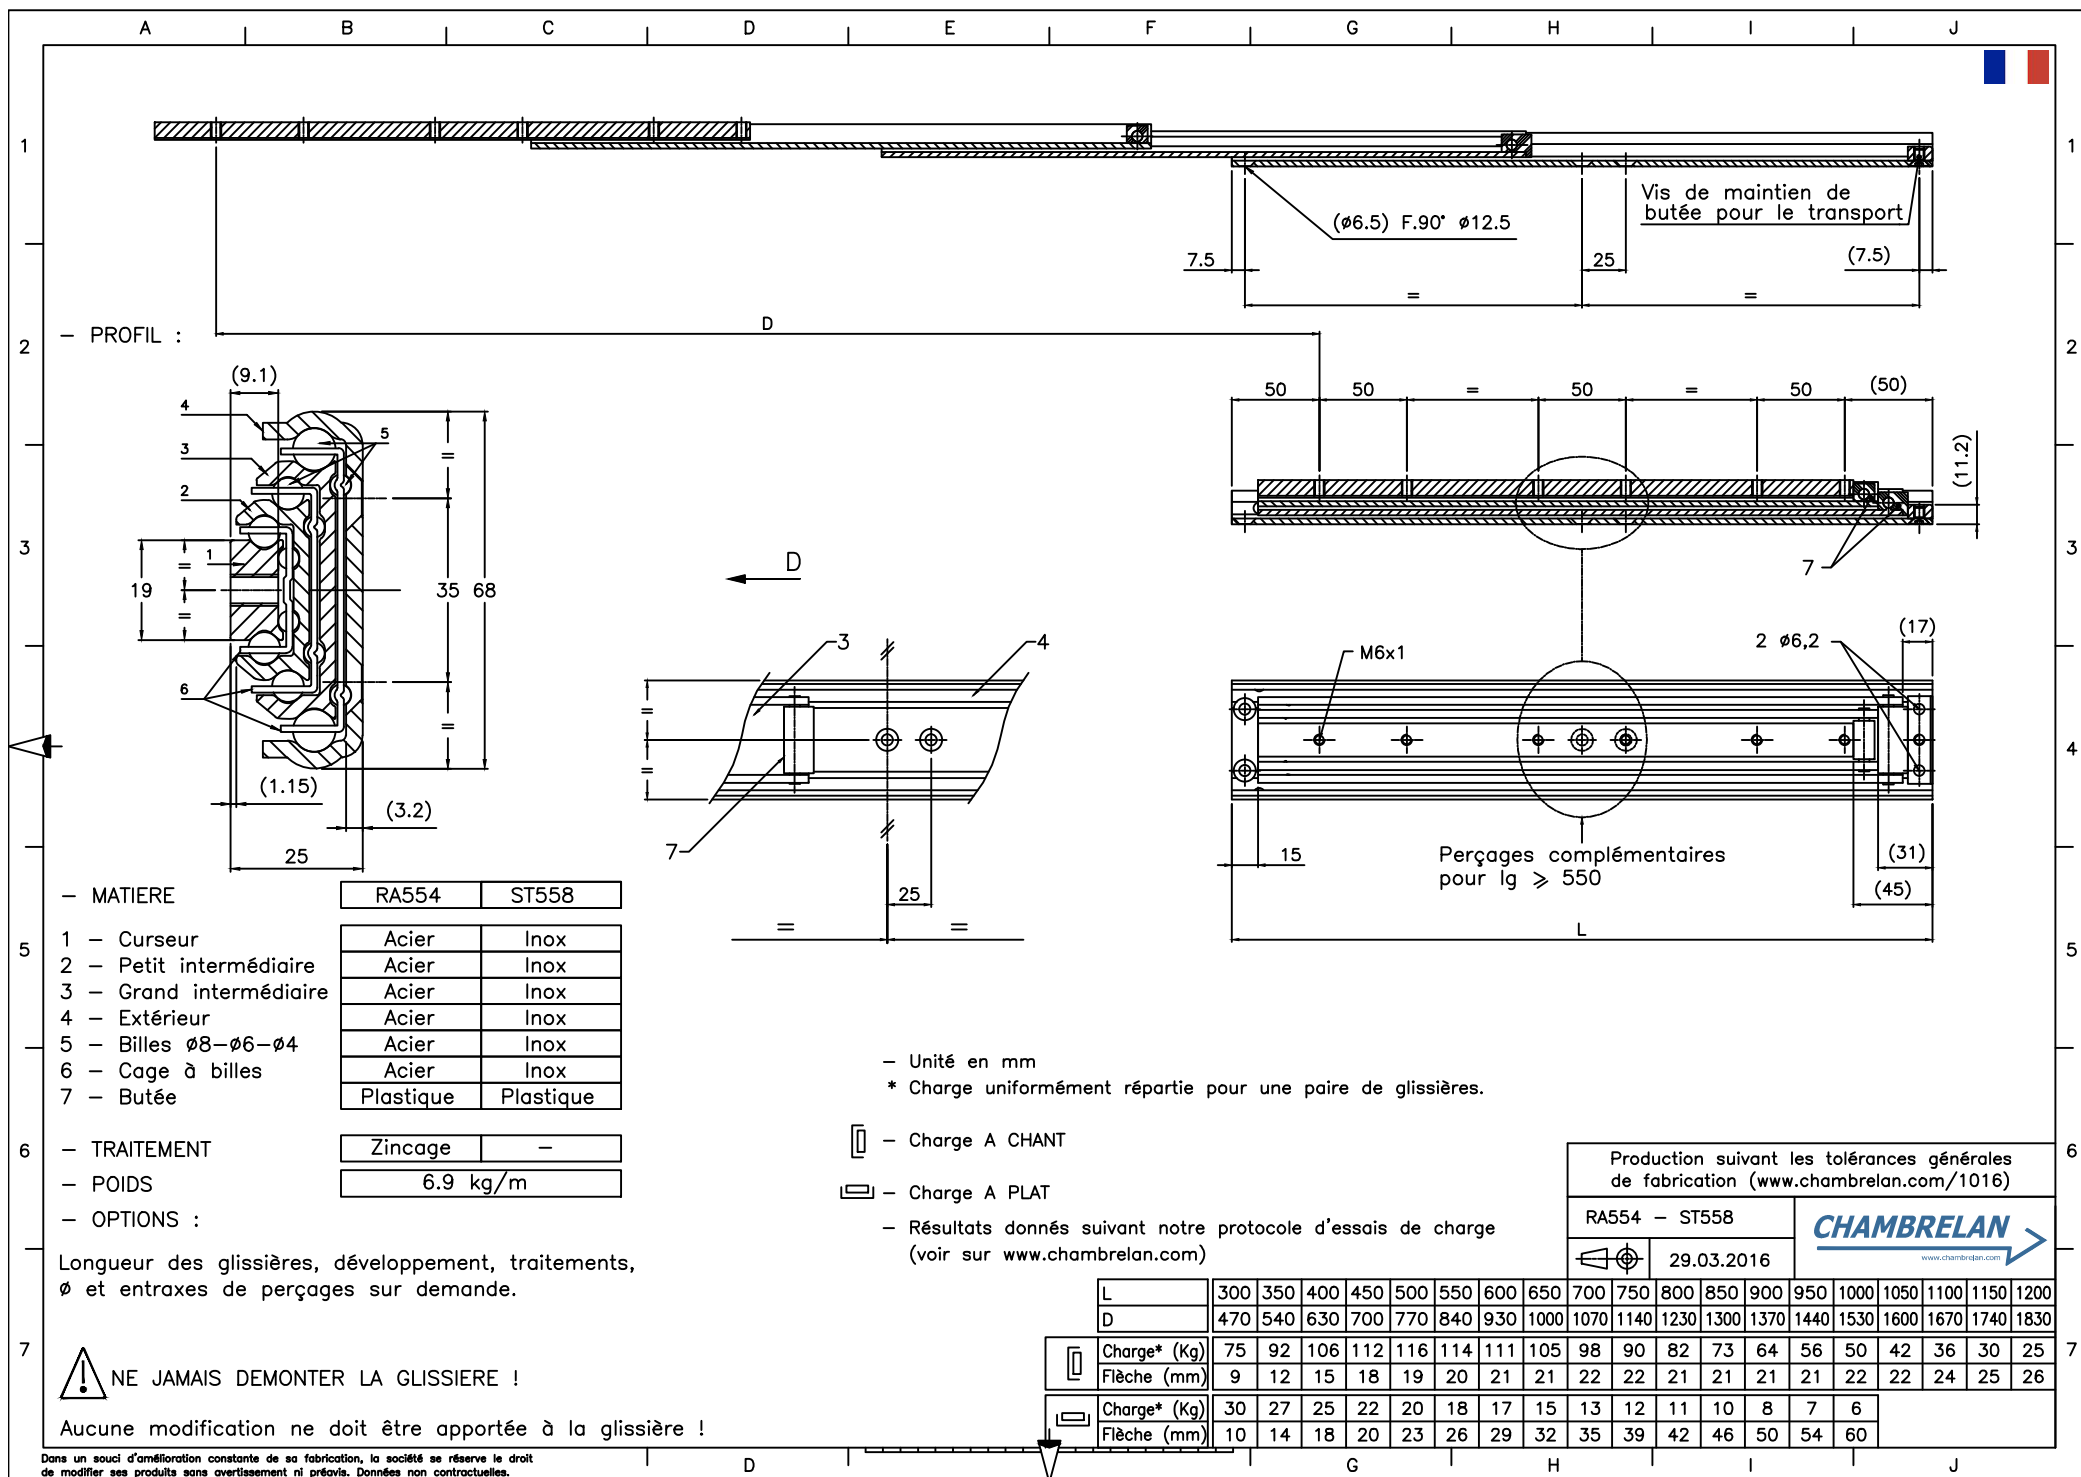

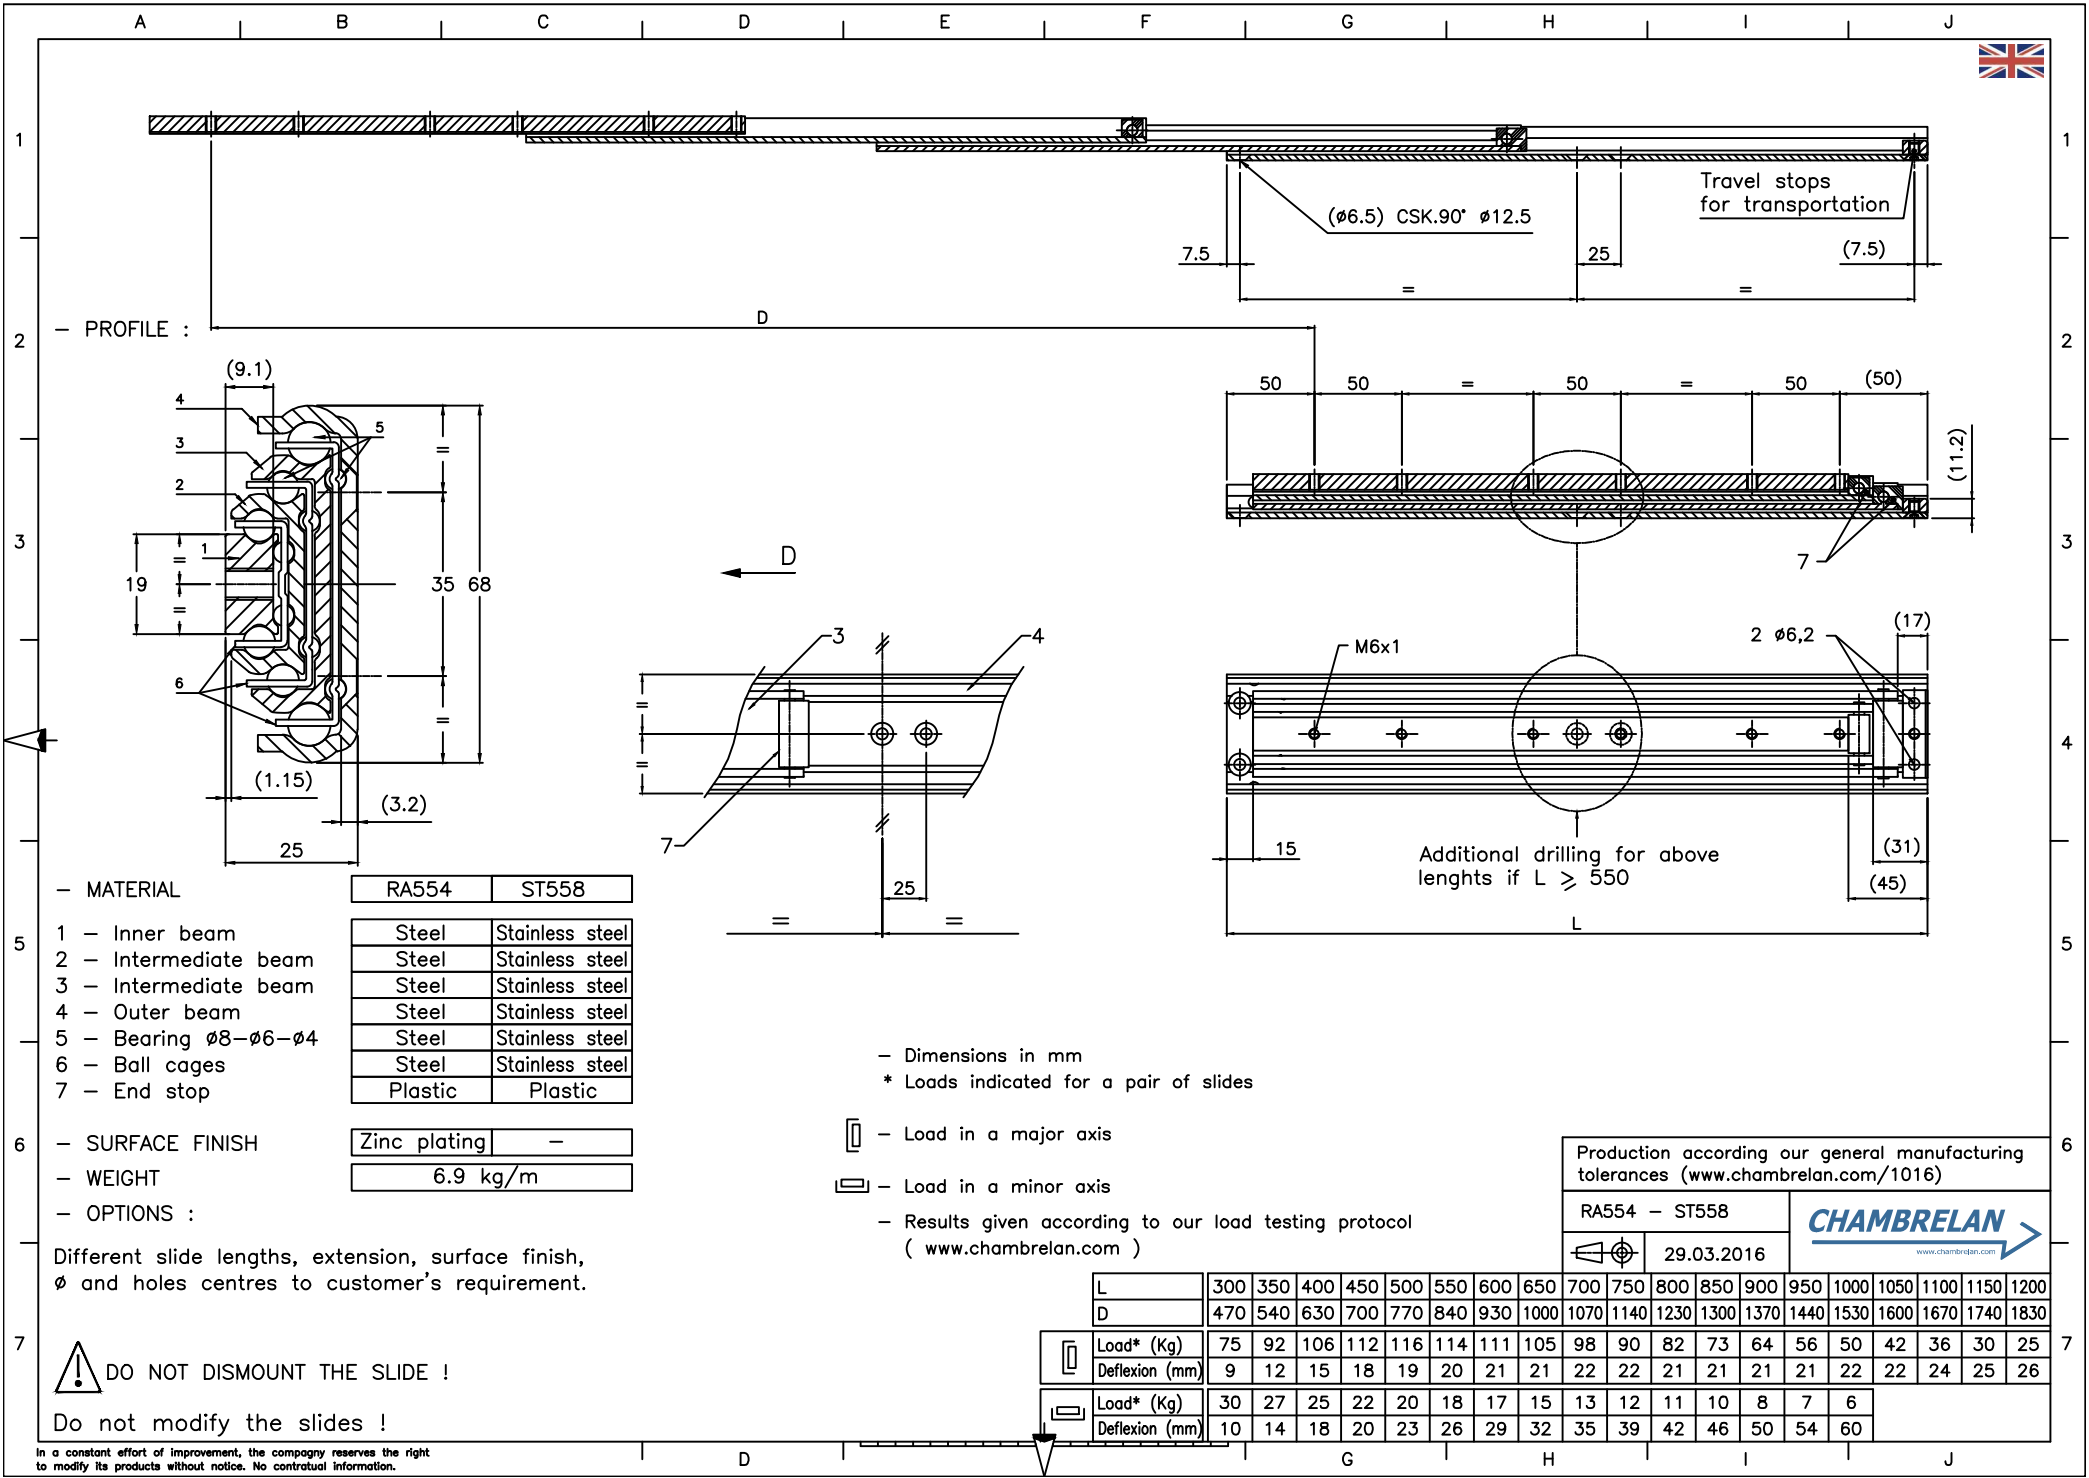

MATERIAL

- 1 - Inner beam
- 2 - Intermediate beam
- 3 - Intermediate beam
- 4 - Outer beam
- 5 - Bearing $\phi 8-\phi 6-\phi 4$
- 6 - Ball cages
- 7 - End stop

	RA554	ST558
1 - Inner beam	Steel	Stainless steel
2 - Intermediate beam	Steel	Stainless steel
3 - Intermediate beam	Steel	Stainless steel
4 - Outer beam	Steel	Stainless steel
5 - Bearing $\phi 8-\phi 6-\phi 4$	Steel	Stainless steel
6 - Ball cages	Steel	Stainless steel
7 - End stop	Plastic	Plastic

SURFACE FINISH

Zinc plating	-
--------------	---

WEIGHT

6.9 kg/m

OPTIONS :

Different slide lengths, extension, surface finish, ϕ and holes centres to customer's requirement.

Dimensions in mm
* Loads indicated for a pair of slides

Load in a major axis

Load in a minor axis

Results given according to our load testing protocol
(www.chambrelan.com)

Production according our general manufacturing tolerances (www.chambrelan.com/1016)


RA554 - ST558	29.03.2016

L	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
D	470	540	630	700	770	840	930	1000	1070	1140	1230	1300	1370	1440	1530	1600	1670	1740	1830
Load* (Kg)	75	92	106	112	116	114	111	105	98	90	82	73	64	56	50	42	36	30	25
Deflexion (mm)	9	12	15	18	19	20	21	21	22	22	21	21	21	21	22	22	24	25	26
Load* (Kg)	30	27	25	22	20	18	17	15	13	12	11	10	8	7	6				
Deflexion (mm)	10	14	18	20	23	26	29	32	35	39	42	46	50	54	60				

DO NOT DISMOUNT THE SLIDE !

Do not modify the slides !

In a constant effort of improvement, the company reserves the right to modify its products without notice. No contractual information.

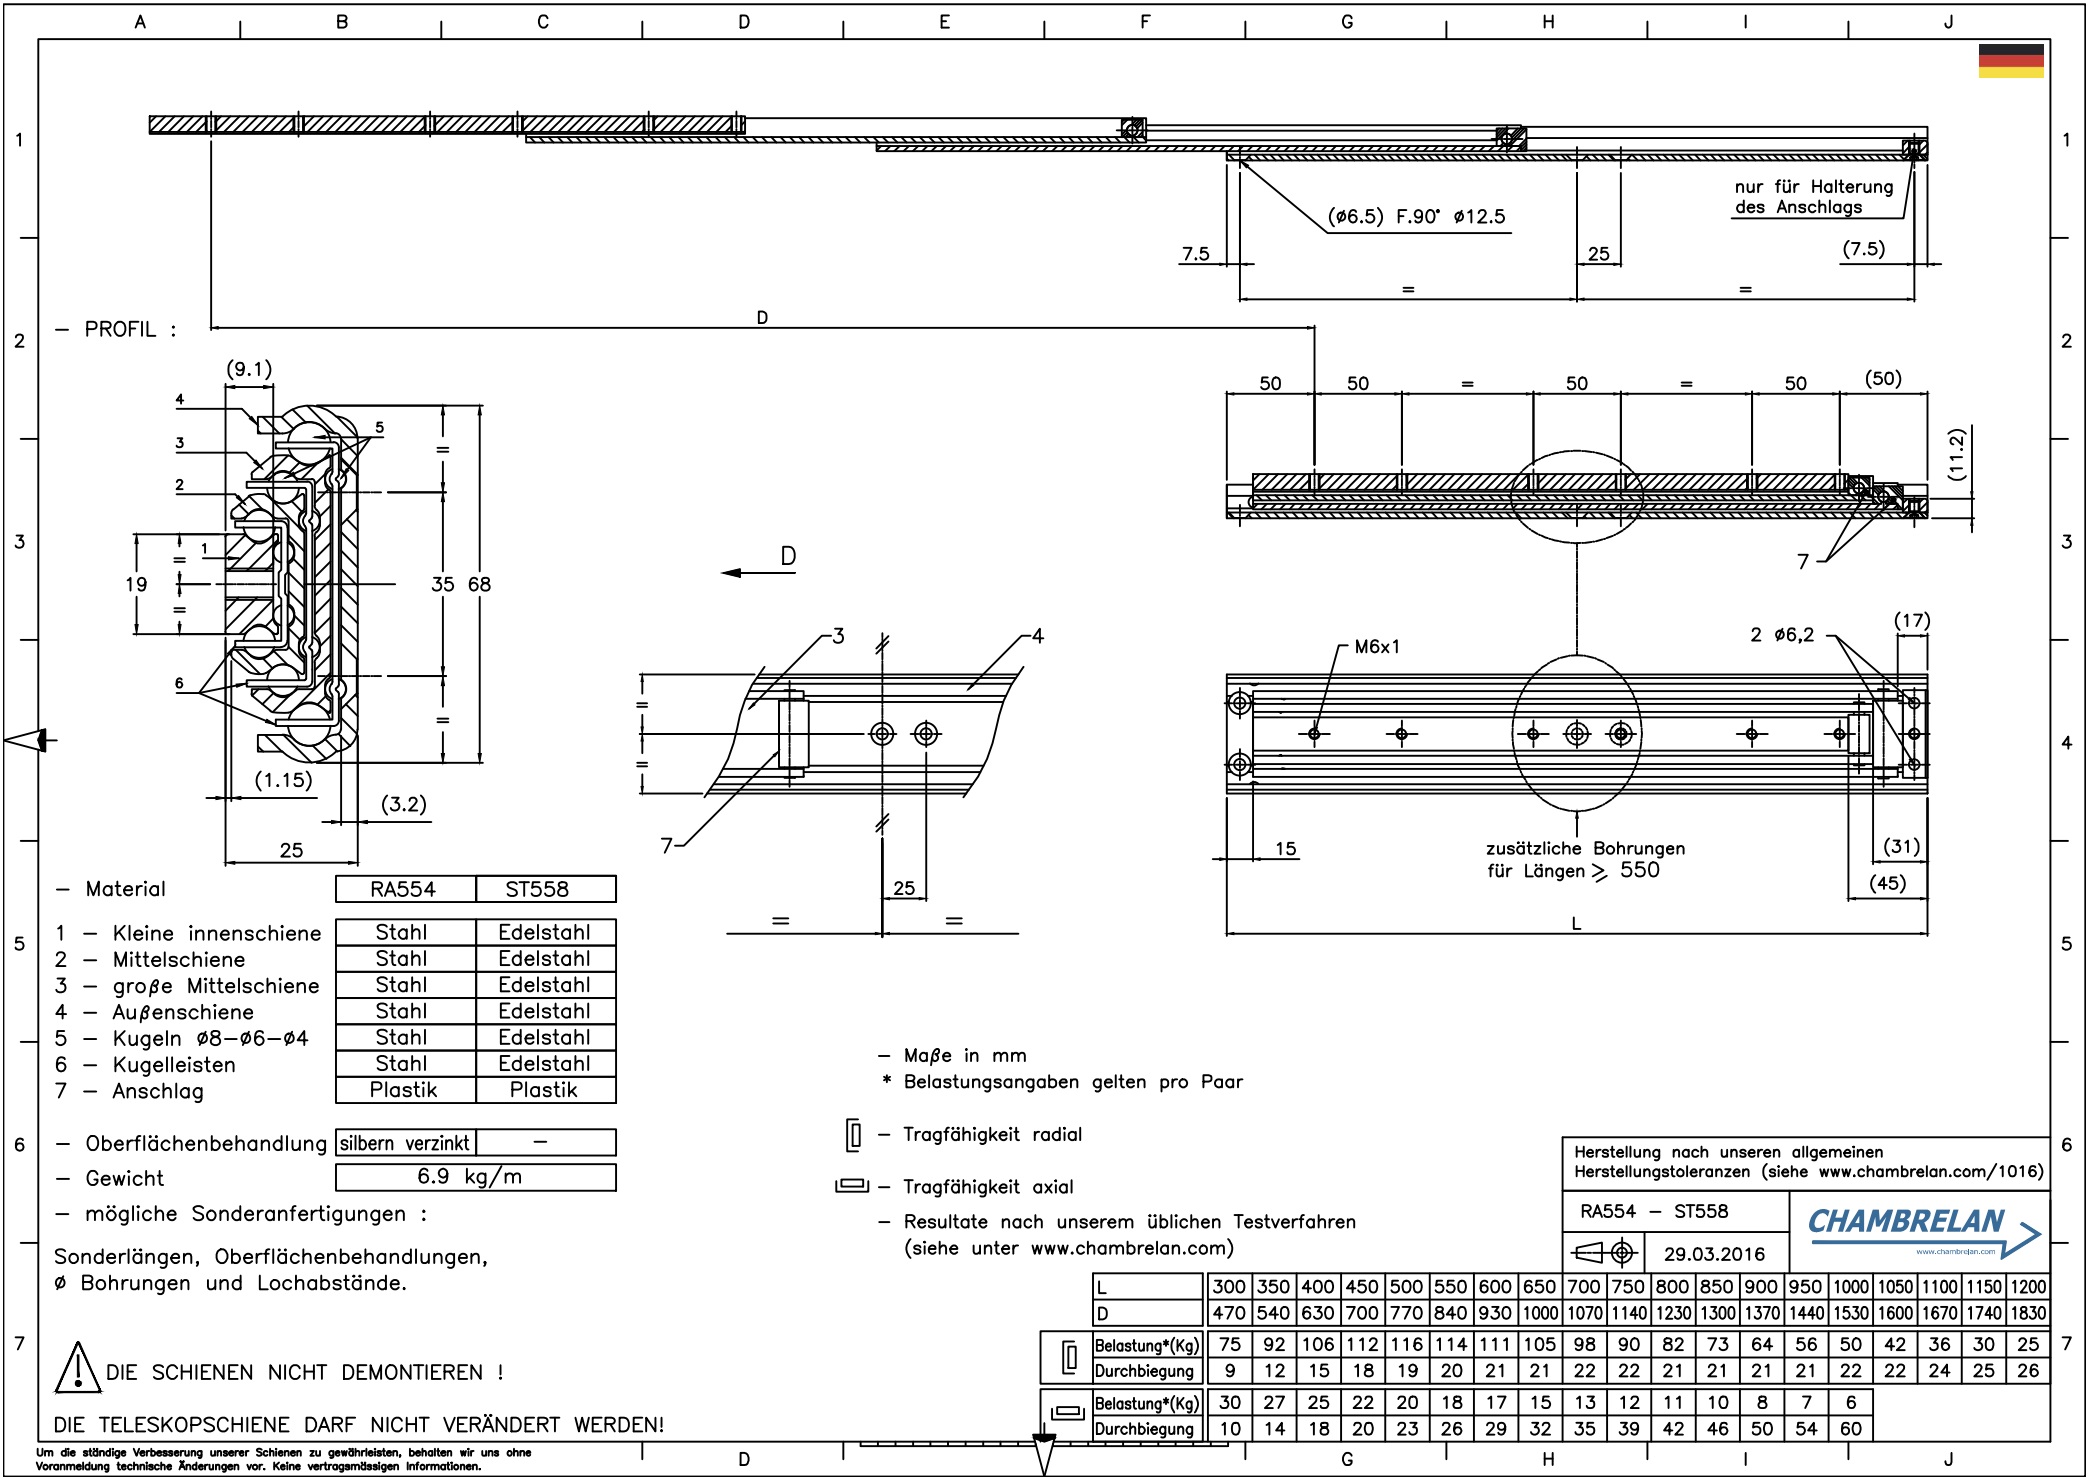

PROFIL :

Material

- 1 - Kleine innenschiene
- 2 - Mittelschiene
- 3 - große Mittelschiene
- 4 - Außenschiene
- 5 - Kugeln Ø8-Ø6-Ø4
- 6 - Kugelleisten
- 7 - Anschlag

RA554	ST558
Stahl	Edelstahl
Stahl	Edelstahl
Stahl	Edelstahl
Stahl	Edelstahl
Stahl	Edelstahl
Stahl	Edelstahl
Plastik	Plastik

Oberflächenbehandlung

silbern verzinkt	-
------------------	---

Gewicht

6.9 kg/m

mögliche Sonderanfertigungen :

Sonderlängen, Oberflächenbehandlungen,
Ø Bohrungen und Lochabstände.

! DIE SCHIENEN NICHT DEMONTIEREN !

DIE TELESKOPSCHIENE DARF NICHT VERÄNDERT WERDEN!

Maße in mm
* Belastungsangaben gelten pro Paar

- Tragfähigkeit radial
- Tragfähigkeit axial

Resultate nach unserem üblichen Testverfahren
(siehe unter www.chambrean.com)

Herstellung nach unseren allgemeinen
Herstellungstoleranzen (siehe www.chambrean.com/1016)


RA554 - ST558

29.03.2016

CHAMBRELAN

L	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
D	470	540	630	700	770	840	930	1000	1070	1140	1230	1300	1370	1440	1530	1600	1670	1740	1830
Belastung*(Kg)	75	92	106	112	116	114	111	105	98	90	82	73	64	56	50	42	36	30	25
Durchbiegung	9	12	15	18	19	20	21	21	22	22	21	21	21	21	22	22	24	25	26
Belastung*(Kg)	30	27	25	22	20	18	17	15	13	12	11	10	8	7	6				
Durchbiegung	10	14	18	20	23	26	29	32	35	39	42	46	50	54	60				

Um die ständige Verbesserung unserer Schienen zu gewährleisten, behalten wir uns ohne
Vorankündigung technische Änderungen vor. Keine vertragstypischen Informationen.

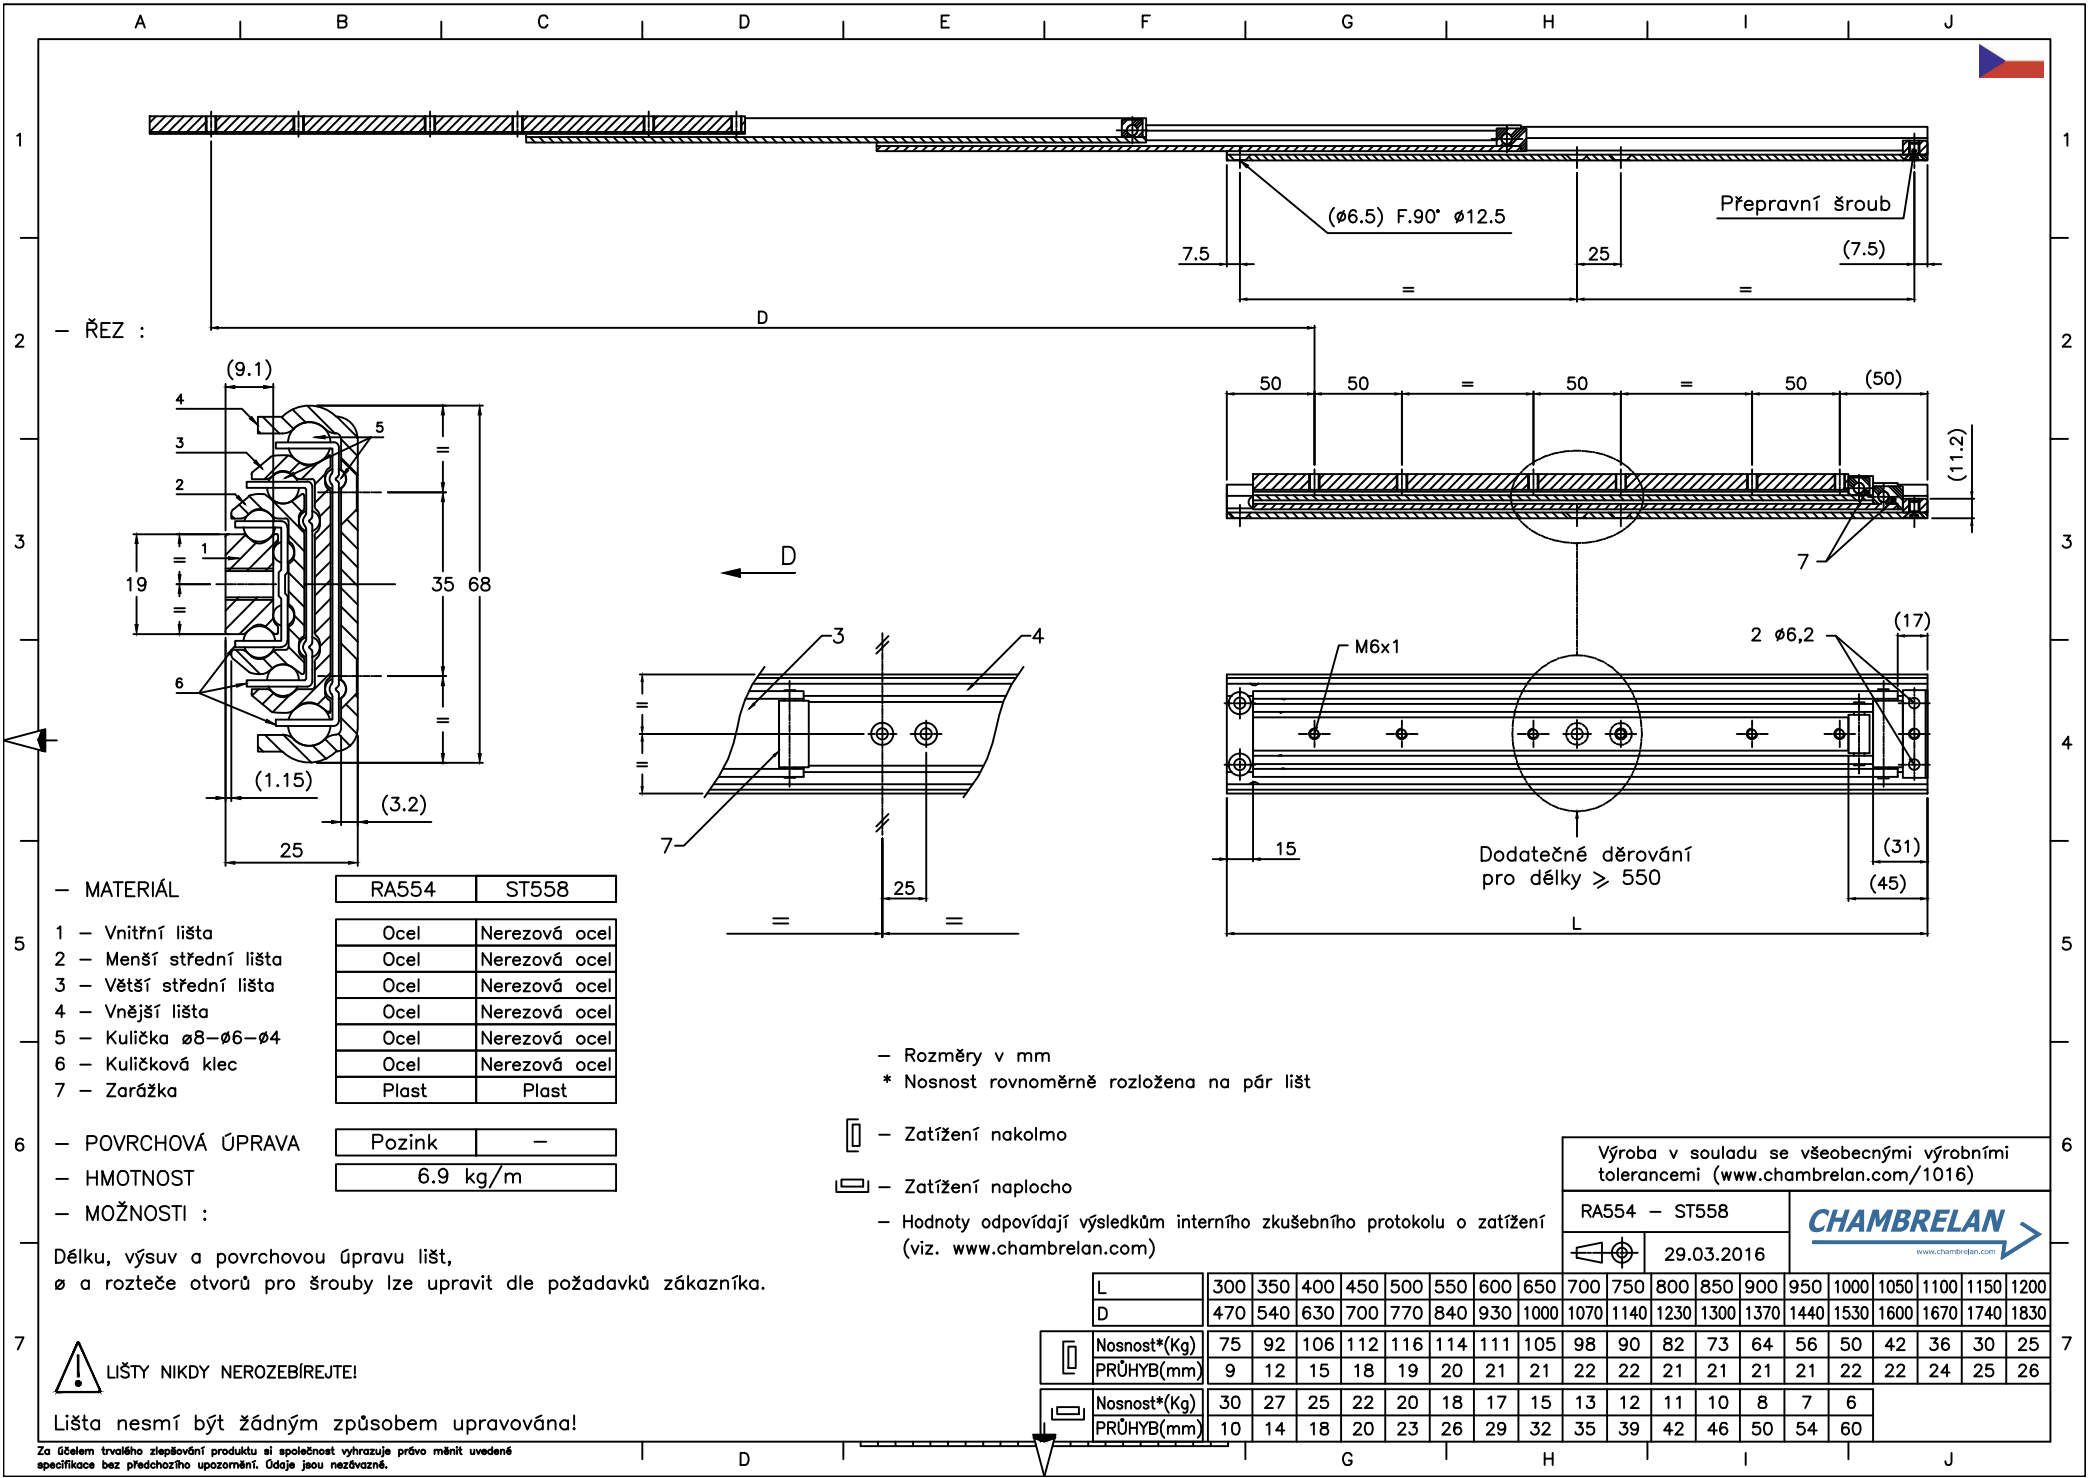

⚠ LIŠTY NIKDY NEROZEBÍREJTE!

Lišta nesmí být žádným způsobem upravována!

Za účelem trvalého zlepšování produktu si společnost vyhrazuje právo měnit uvedené specifikace bez předchozího upozornění. Údaje jsou nezávazné.

