



ST508V




www.chambreлан.com/ST508

Inox	Extension Totale	 Français	2
Stainless steel	Total extension	 English	3
Edelstahl	Vollauszüge	 Deutsch	4
Nerezová ocel	Plný výsuv	 Český	5
Acero inoxidable	Extension Total	 Español	6
Acciaio inox	Estensione Totale	 Italiano	7
Roestvrij staal	Geheel uittrekbaar	 Nederlands	8
Нержавеющая сталь	Полное выдвижение	 Русский	9
Stal nierdzewna	Wysuw pełny	 Polski	10

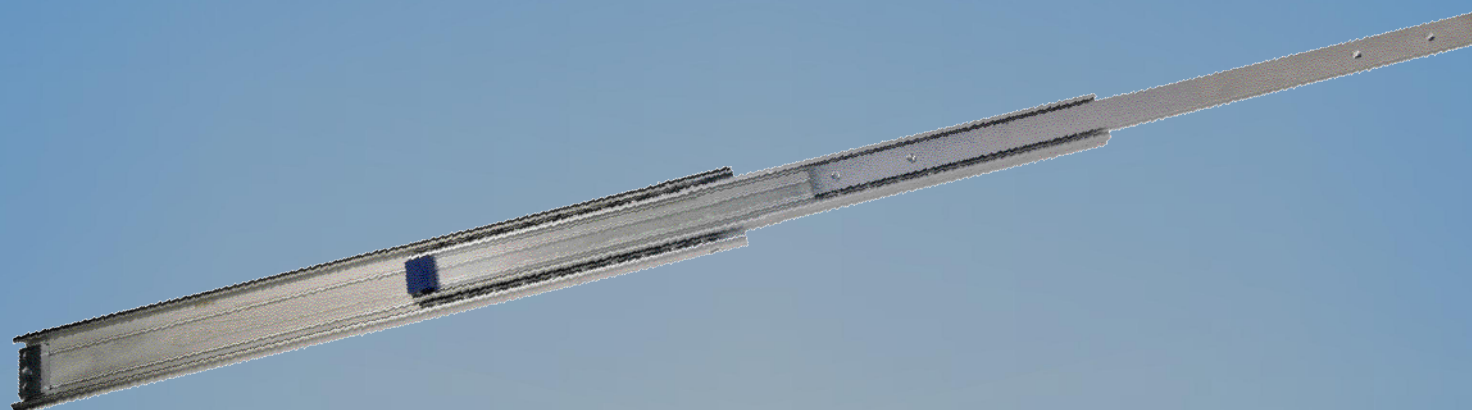

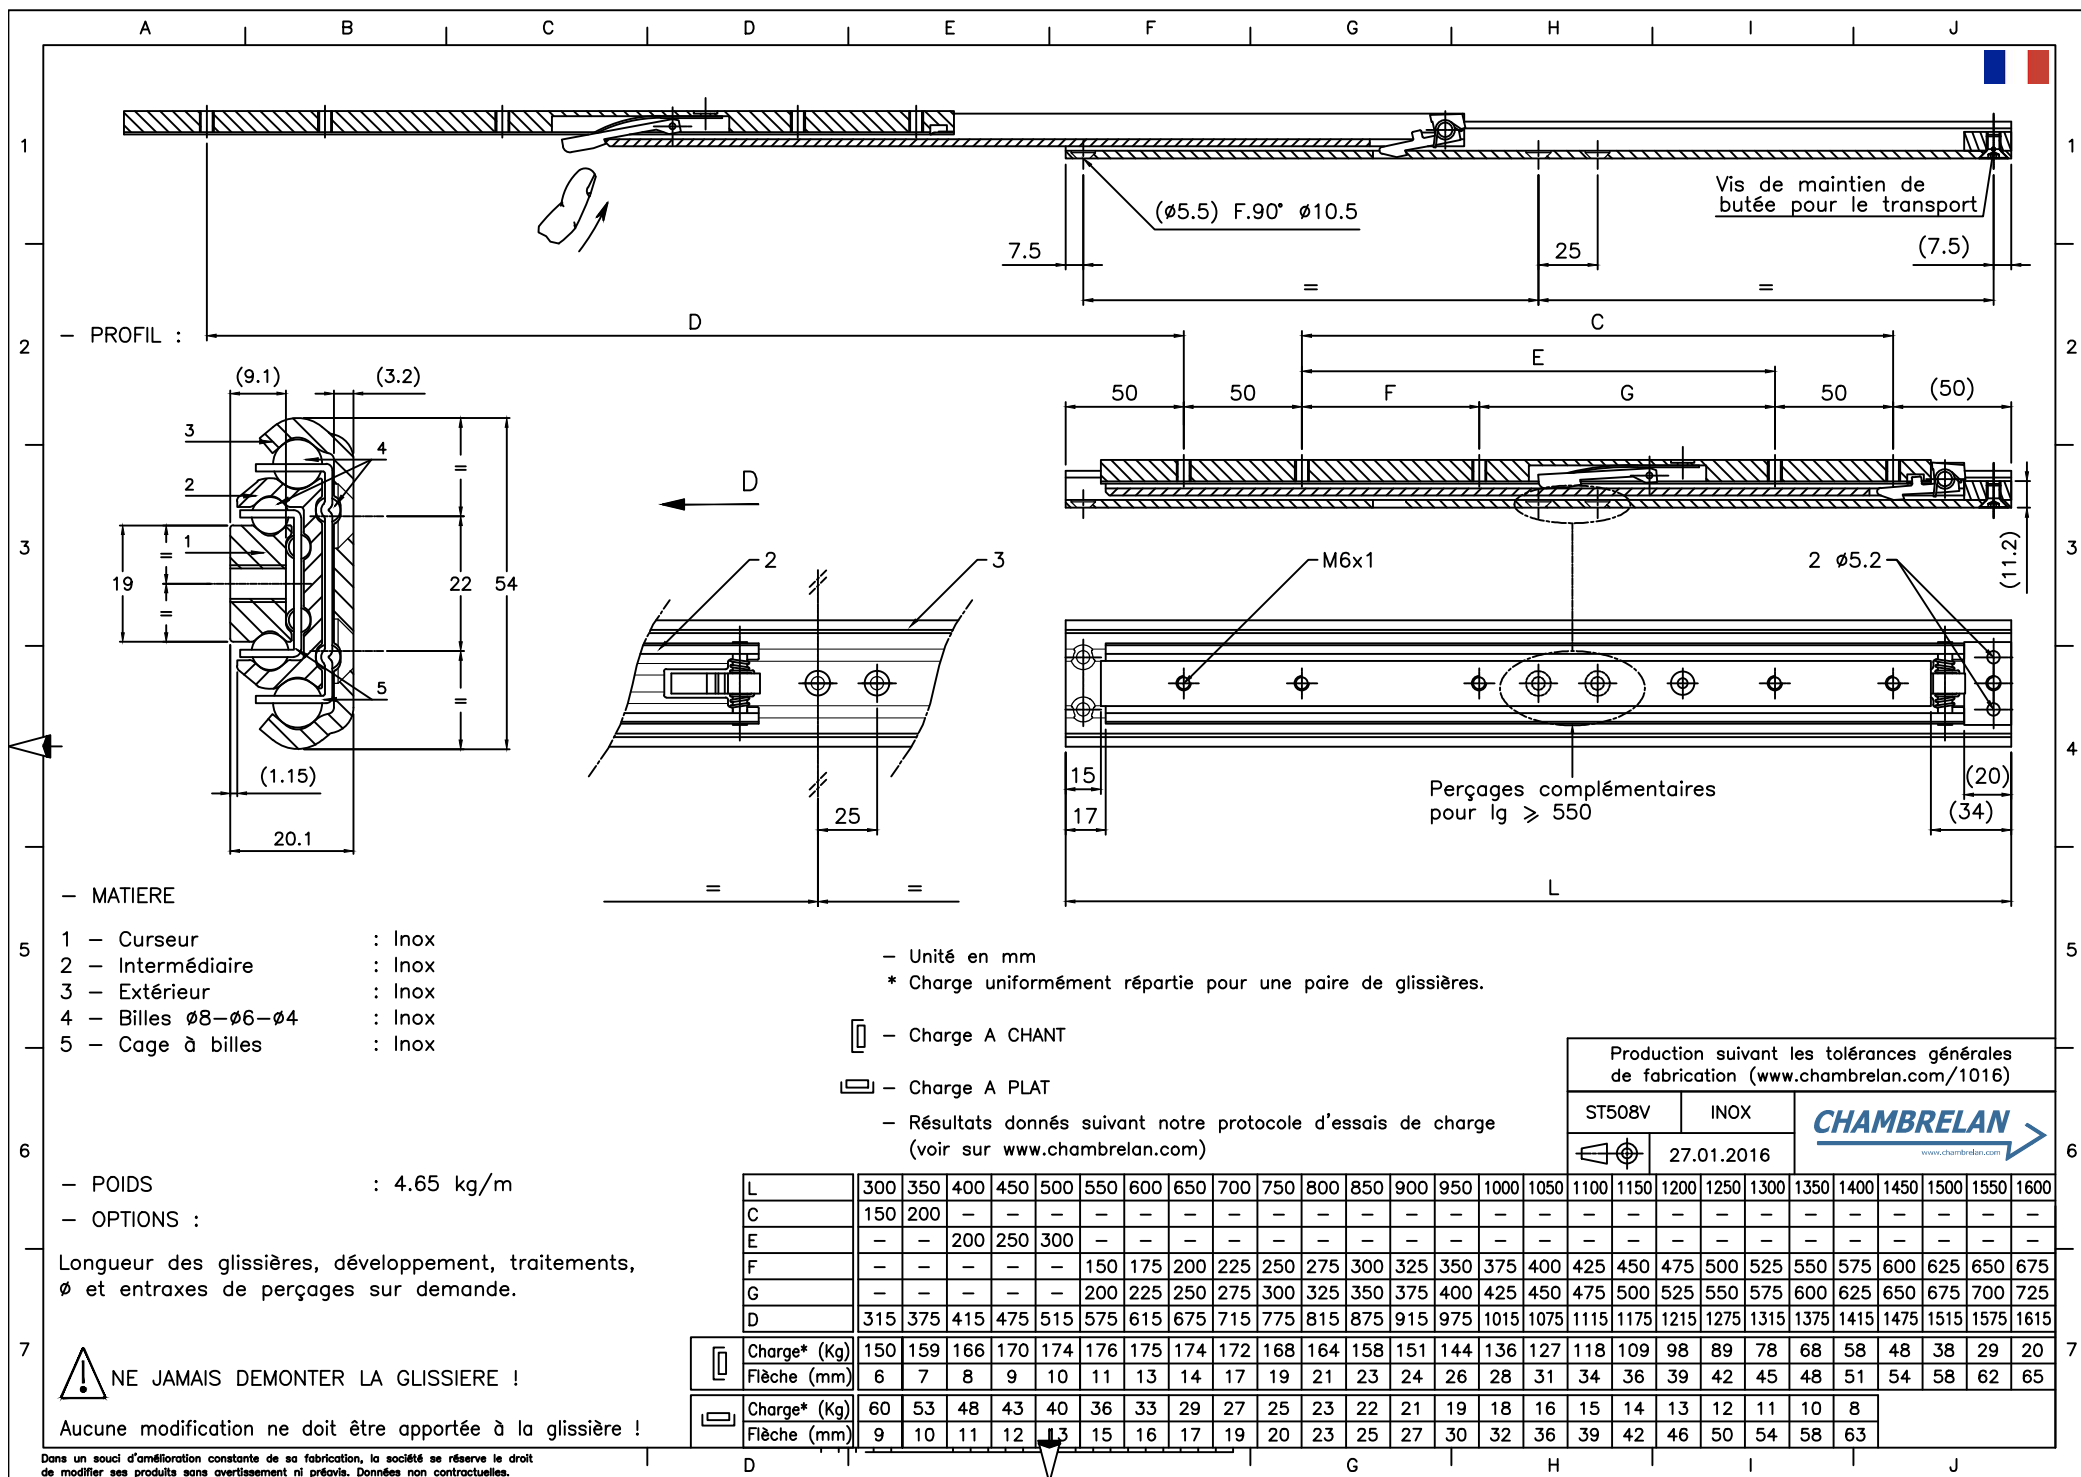

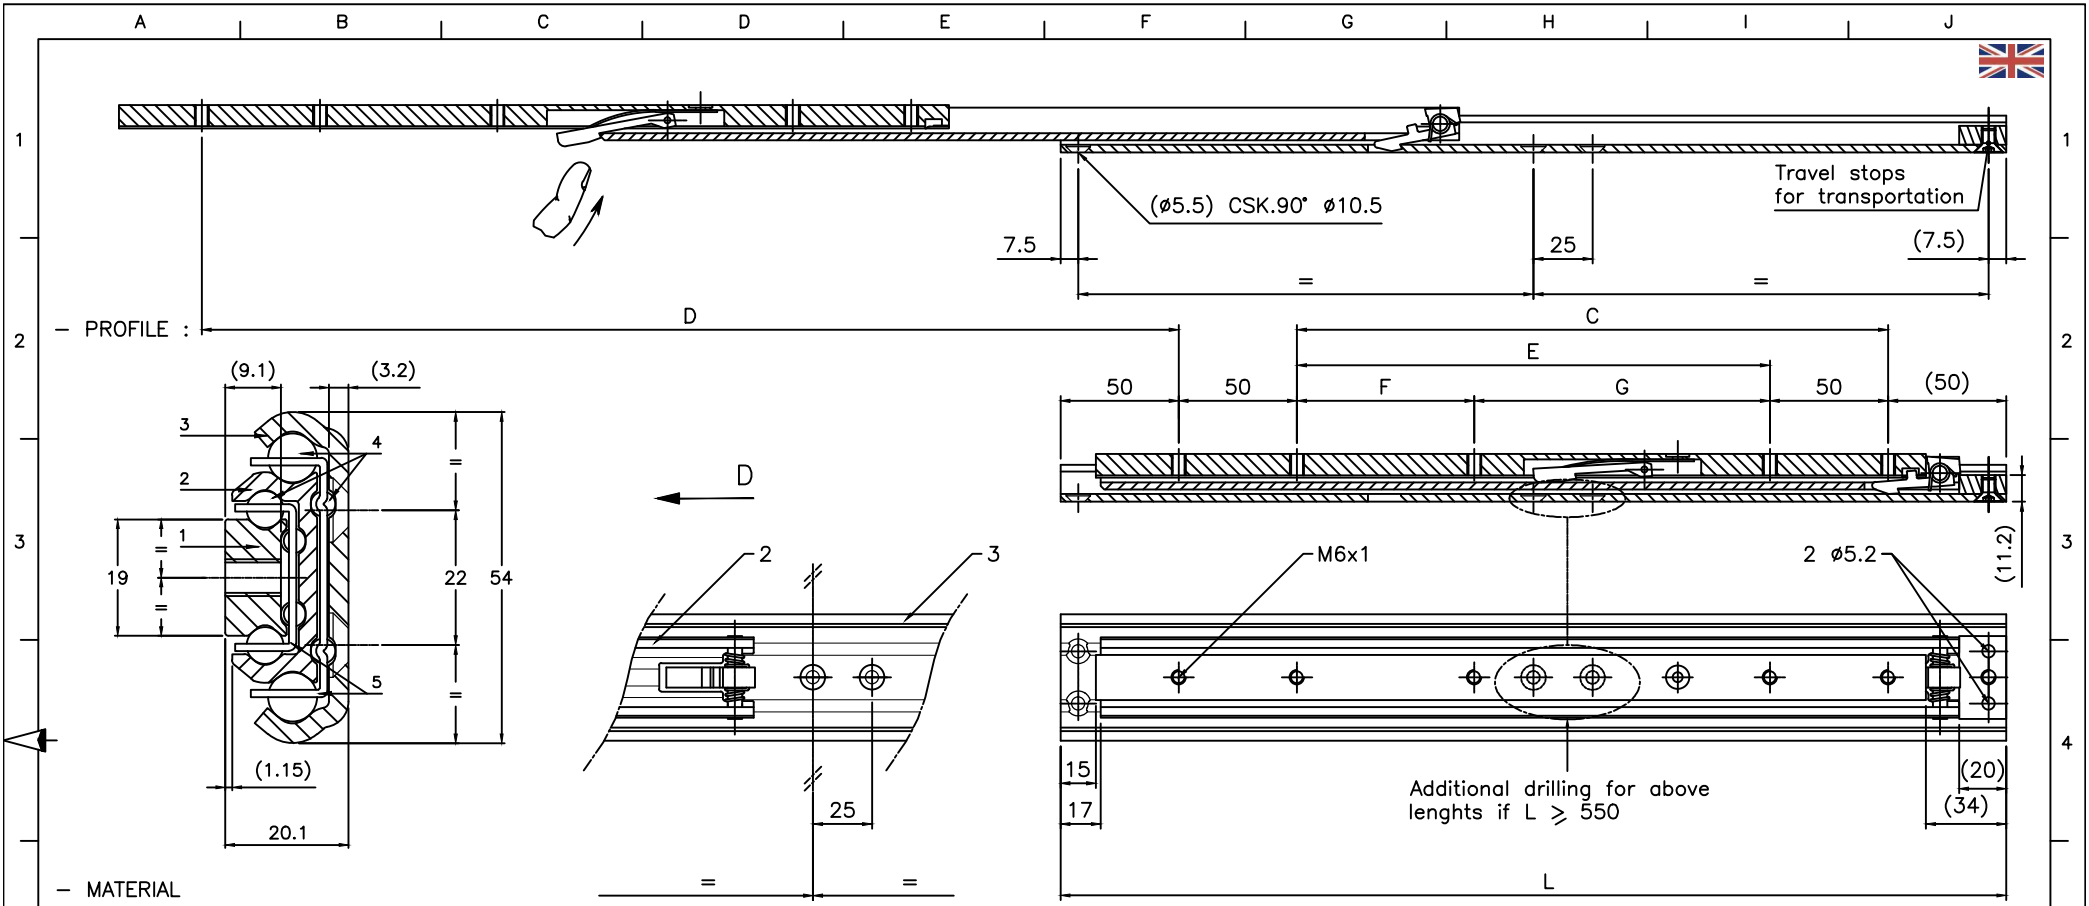

MATERIAL

- 1 - Inner beam : Stainless steel
- 2 - Intermediate beam : Stainless steel
- 3 - Outer beam : Stainless steel
- 4 - Bearing $\phi 8-\phi 6-\phi 4$: Stainless steel
- 5 - Ball cages : Stainless steel

- Dimensions in mm
* Loads indicated for a pair of slides

- Load in a major axis

- Load in a minor axis

- Results given according to our load testing protocol
(www.chambrean.com)

- WEIGHT : 4.65 Kg/m

OPTIONS :

Different slide lengths, extension, surface finish,
 ϕ and holes centres to customer's requirement.

DO NOT DISMOUNT THE SLIDE !

Do not modify the slides !

Production according our general manufacturing tolerances (www.chambrean.com/1016)

ST508V	STAINLESS STEEL	CHAMBREAN
	27.01.2016	www.chambrean.com

L	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600
C	150	200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
E	-	-	200	250	300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
F	-	-	-	-	-	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675
G	-	-	-	-	-	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675	700	725
D	315	375	415	475	515	575	615	675	715	775	815	875	915	975	1015	1075	1115	1175	1215	1275	1315	1375	1415	1475	1515	1575	1615
Load* (Kg)	150	159	166	170	174	176	175	174	172	168	164	158	151	144	136	127	118	109	98	89	78	68	58	48	38	29	20
Deflexion (mm)	6	7	8	9	10	11	13	14	17	19	21	23	24	26	28	31	34	36	39	42	45	48	51	54	58	62	65
Load* (Kg)	60	53	48	43	40	36	33	29	27	25	23	22	21	19	18	16	15	14	13	12	11	10	8				
Deflexion (mm)	9	10	11	12	13	15	16	17	19	20	23	25	27	30	32	36	39	42	46	50	54	58	63				

